

## TWO-AXIS SOLAR PANEL TRACKING DEVICE PROTOTYPE WITH IOT-BASED MONITORING

M. Asep Rizkiawan<sup>1\*</sup>, Agus Sofwan<sup>2</sup>, Abdul Multi<sup>3</sup>

<sup>123</sup>Electrical Engineering, Master Program, Faculty of Engineering, Nasoinal Institute of Science and Technology, Jakarta, Indonesia

### Article History

Received : Dec 2023

Revised : Feb 2024

Accepted : Mar 2024

Published : Mar 2024

### Corresponding author\*:

m\_asep@uhamka.ac.id

### No. Contact:

085213960221

### Cite This Article:

M. A. R. Awan, A. S. Sofwan, and A. Multi, "TWO-AXIS SOLAR PANEL TRACKING DEVICE PROTOTYPE WITH IOT-BASED MONITORING ", IJST, vol. 3, no. 1, pp. 13–24, Mar. 2024.

### DOI:

<https://doi.org/10.56127/ijst.v3i1.1086>

**Abstract:** The aim of this project is to develop a dual-axis solar tracker equipped with an IoT monitoring system with the BLYNK platform using Arduino. Overall, solar energy refers to technologies that generate power from sunlight. The utilization of solar energy has been around for centuries and has been widely used without relying on other energy supplies. However, its importance is increasing as environmental awareness grows and the availability of other energy sources, such as fuel, becomes limited. Sun tracking systems are an effective technology that can improve the efficiency of solar panels by following the movement of the sun. With the help of this system, solar panels can automatically orient themselves to sunlight, improve sunlight detection, and increase electricity collection because solar panels can always be in a bright position. This project focuses on developing a two-axis sun tracker using Arduino Uno as the main controller. For its implementation, four light-sensitive resistors (LDRs) are used to detect sunlight and maximum light intensity. Two servo motors are used to move the solar panel according to the direction of sunlight detected by the LDRs. Furthermore, an ESP8266 WIFI device is used as an intermediary between the device and the IoT monitoring system. The IoT monitoring system is a website that serves to store data. The efficiency of this system is tested and compared with single axial sun tracking. The results show that the two-axis solar tracking system generates more power, voltage, and current compared to the single axial solar tracker.

**Keywords:** Internet of things (IoT), Prototype Solar Tracker, Dual axis, Photovoltaic, Solar energy.

## INTRODUCTION

Indonesia's potential natural resources, both renewable and non-renewable, make the country a very promising place to live [1]. In many inhabited areas around the world, solar energy is one of the most environmentally friendly forms of energy resources [2]. Technological developments encourage the need for community intelligence in utilizing natural resources wisely [3], [4], [5]. Along with technological advances, there is an increase in electricity consumption by society [6], [7]. In Indonesia, reliance on fossil fuel energy sources as the main source of electricity is still ongoing [8]. Fossil fuels, which are non-renewable and will eventually run out, are the main choice even though it is not clear when the supply will be met [9]. Therefore, Indonesia needs to follow in the footsteps of countries in Europe that have prepared alternatives to replace fossil fuels [10]. As a tropical country with an astronomical location between 6°N - 11°N and 95°E - 141°W, Indonesia has great potential in utilizing renewable energy sources, especially through the use of sunlight throughout the year [11], [12], [13]. In this context, sunlight is a potential source of renewable energy to be used as a substitute for fossil fuels [14], [15]. The utilization of solar energy can be done through various types of natural or nature-based power plants that can be an alternative to replace fossil fuels. For example, solar power plants (PLTS) are one of the solutions that can be counted on [16], [17]. Therefore, in this final project, the author aims to design a power plant design that uses solar thermal energy. This design will focus on the optimization and efficiency of the energy produced by solar panels.

Solar panels are generally permanently installed at a fixed angle, causing them to be unoptimized in absorbing solar radiation due to the sun's movement from east to west [18], [19]. In order for the absorption of solar radiation to be optimized, the surface of the solar panel needs to move so that it is perpendicular to the direction of sunlight [20]. Therefore, efforts need to be made to move the surface of the solar panel so that it can always be in the right position with respect to solar radiation [21], [22]. A solar panel tracking device is a device used to follow the movement of the sun. Changes in the direction of light emitted by the sun and sensor detection can be utilized to monitor the movement of the sun. Sensors commonly used in this research context include photodiodes or LDRs (Light Dependent Resistors) [23], [24].

Previous research has implemented solar panel tracking such as in the study of [25]. The components involved in the circuit include the power supply, ATmega 8535 microcontroller, Liquid Crystal Display (LCD), stepper motor driver, and Light Dependent Resistor (LDR) circuit. As a result, solar trackers or solar panels that are dynamic and can follow the direction of sunlight can produce an increase in output voltage of about 11.53%, compared to fixed or stationary solar modules. The initial output voltage is 11.57 V, an increase of about 1.18 V compared to the static state [26]. Solar trackers refer to electromechanical systems that have the ability to follow the path of sunlight, aiming to point solar panels or collectors directly towards the sun. The goal is to maximize energy collection. Therefore, this research focuses on the manufacturing process and automation of microcontrolled solar trackers. Two mobile structures were constructed: one equipped with a high-precision step motor and four luminosity sensors placed separately in quadrants by a cross structure, while the other was equipped with a DC motor and a 275 Wp solar panel. This allowed the design and evaluation of their behavior separately. The control and automation system is governed by an Arduino MEGA2560 microcontroller, which runs the tracking and positioning algorithms. The successfully created prototype made it possible to carry out an in-depth study of solar tracking strategies based on sensors and controls applied to the DC motor [27].

Photovoltaic (PV) energy is one of the most significant renewable energy sources globally. PV efficiency can be increased up to 60% by using dual-axis solar trackers, which aim to maximize PV exposure to the sun. The main component in this dual-axis solar tracker is the sun location sensor, which uses four Light Dependent Resistors (LDRs) connected to a potentiometer to improve accuracy. The system is controlled by an Arduino UNO which controls two stepper motors. Two experiments were conducted, resulting in an LDR tolerance of 0.05V and an LDR calibration error of 0.03V. Both experiments show that the LDR has good capabilities for dual-axis sun trackers, and the use of a potentiometer successfully improves the accuracy. In the context of increasing global energy demand and depletion of fossil resources, the development of new electricity production systems is becoming increasingly important. Photovoltaic solar energy, due to its simplicity and applicability, is becoming one of the most desired solutions in various homes. This research involves the development of a new photovoltaic solar tracker prototype with an Arduino platform. A feedback control system was designed to enable solar tracking with two axes using stepper motors and linear actuators controlled by photodiode-based electronic circuits. In addition, the physical construction of the prototype allowed the observation of the effectiveness of the design and its ability to make maximum use of solar radiation. The prototype positions the panel perpendicularly to sunlight, enhancing its performance for future deployment in homes. Comparison results between the developed prototype and static panels oriented at latitude show an increase in energy gain of about 18% [28]. Then there is also research [29], [30] exploring the significance of implementing a sun tracking system in solar energy extraction using LabVIEW software. monitoring using LabVIEW is very simple, low-cost, and reliable [31], but with the advancement of technology internet-based monitoring would logically be better because it is certainly easier and more integrated and can be anywhere to monitor [32].


Based on the explanation and previous research in monitoring it is still not good and effective, while in the current era the internet is very helpful and facilitates work, therefore the authors conduct research on monitoring and monitoring based on the Internet of Things (IoT), because by utilizing the Internet everything will become easier and more effective [33], [34]. However, there have also been studies that use the Internet of Things as a tool for monitoring or monitoring tracked solar panels, in research [35], Using the Internet of Things (IoT) as a monitoring of solar panels with Ubidots platform, the IOT monitoring system is a website that serves to store data. The efficiency of this system has been tested and compared with a single axial solar tracker. As a result, the two-axis solar tracking system produces more power, voltage and current. In this research used in monitoring and monitoring is with the Blynk platform. Then compare the power data results from the tracked solar panel prototype with the untracked one and the performance improvement on the solar panel. The results of this study will add to the research data on monitoring or monitoring solar panel tracking properly and effectively.

**RESEARCH METHOD**

The system setup in the methodology details the steps of designing a two-axis solar panel device with IoT-based monitoring. This process includes system design sequences, block diagrams, and flowcharts that describe the design of the device.

**Design Flow**


In designing this two-axis solar panel tracking device, there are several work steps that I take to obtain the desired results, as can be seen in Figure 1

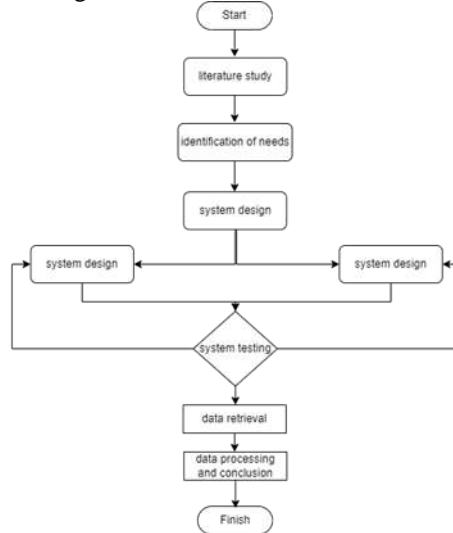

**Figure 1.** Flowchart of the design of a two-axis solar panel tracking device

**Block diagram of System design**

This block diagram provides a basic overview of the system to be created. Each part in the system block has a specific function. The block diagram to be created will be similar to the one shown in Figure 2

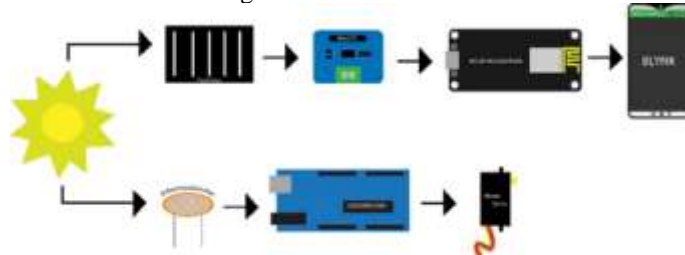

**Figure 2.** Block diagram of System design

With reference to the scheme above, this solar panel tracking device equipped with an IoT-based monitoring system uses two microcontrollers, namely Arduino and NodeMCU ESP8266. Each microcontroller has its specific role. The Arduino microcontroller is responsible for processing input from the LDR (Light Dependent Resistor) sensor, which will drive the servo motor according to the degree that has been set in the Arduino program. Meanwhile, the NodeMCU ESP8266 microcontroller acts as a data sender obtained from measuring voltage, current, and power using the INA219 sensor. The data will be sent to the BLYNK application via a WiFi connection that has been prepared.

**Hardware Design**

The manufacture of this LDR (Light Dependent Resistor) sensor involves a connection with an Arduino Uno Microcontroller, along with an additional component in the form of a 1K ohm resistor, as shown in Figure 3 below.

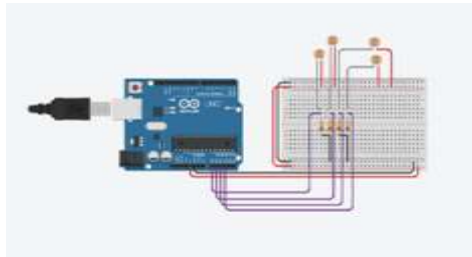


Figure 3. LDR sensor hardware design

Table 1. LDR Sensor Connection Pins

| LDR Sensor | Arduino Uno |
|------------|-------------|
| LDR 1      | Input A0    |
| LDR 2      | Input A1    |
| LDR 3      | Input A2    |
| LDR 4      | Input A3    |

The servo motor design involves using two servo motors to adjust the position of the solar panel according to a preset degree, following the direction of the incident sunlight.

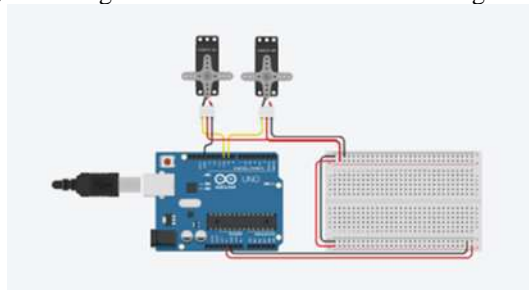


Figure 4. Servo Motor Hardware Design

Table 2. Servo Motor Connection Pins

| Motor Sevo MG966R | Arduino Uno          |
|-------------------|----------------------|
| GND               | GND                  |
| VDC               | In +5                |
| Data              | Digital Pin 9 and 10 |

With reference to the block diagram in Figure 1, the functioning of this hardware involves the use of an Arduino UNO as the control center and an LDR sensor as the sunlight detector. The LDR sensor detects the sunlight falling on it, allowing the servo motor to move and adjust its position according to the direction of the sunlight. The hardware schematic of the two-axis solar panel tracking system is shown in Figure 5.

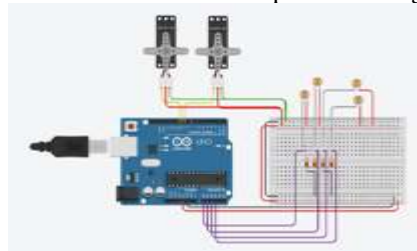


Figure 5. Hardware Design of Sensors and Servo Motors

**Software Design**


The software is designed through the use of the Arduino IDE application, which needs to be installed on a computer or laptop beforehand. In the Arduino IDE, the C programming language is used. In addition to the Arduino IDE, another tool used is the flowchart diagrammer. More information can be found in the explanation below.

The Arduino IDE is an application used to code the device being planned, using the C programming language as its primary language.




**Figure 6.** Arduino IDE Application View

In Figure 7 there is a flow chart of the solar panel tracking device, starting with the initialization of the pins connected to each component such as four LDR sensors and two servo motors. After pin initialization, the next step is to find the average value generated by each LDR sensor and divide it into four sections, namely top left, top right, bottom left, and bottom right. After obtaining the average of each section, calculations are performed to find the difference in value between the upper and lower sensors. Next, a comparison is made to determine the movement of the two servo motors used. If the value of the upper sensor is smaller than the lower sensor, the vertical servo motor will move downward, reducing the degree value of the vertical servo motor, and vice versa. Furthermore, if the value of the right sensor is smaller than the left sensor, the servo motor will move towards the left until the values of all sensors become equal.

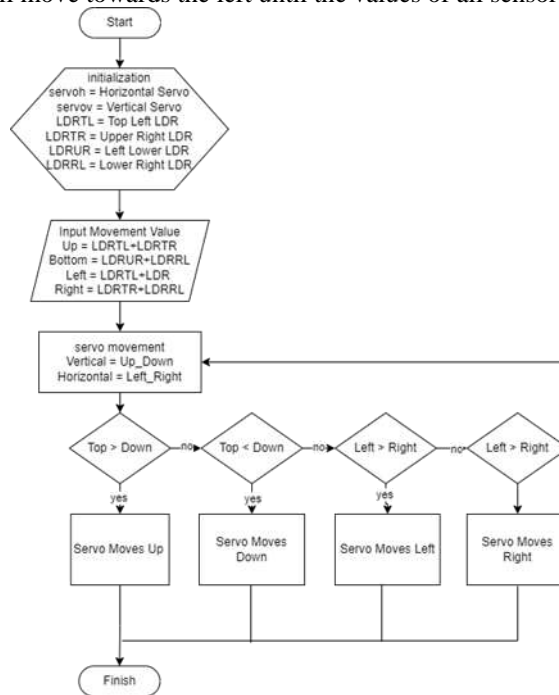

**Figure 7.** Software System Flowchart

The flowchart shown in Figure 8 details the ESP8266 MCU Node program to read the current, voltage, and power generated by the IoT-based two-axis solar panel tracking device. In initialization, there is a wifi and address configuration to send data to the BLYNK application. The next process involves setting the wifi and BLYNK address, where the ESP8266 will connect to the wifi network that has been set in the program. After that, the INA219 sensor will read the voltage, current, and power generated by the solar panel tracking device. Once the INA219 sensor successfully reads these values, the information will be immediately sent to the BLYNK application that has been prepared by the researcher.

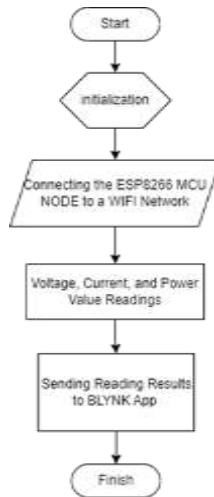

**Figure 8.** NodeMCU ESP8266 program flowchart

In this study, researchers utilized BLYNK as a means to monitor the voltage, current, and power generated by the solar panel with the help of calculations from the INA219 sensor. The BLYNK display design that has been prepared can be found in Figure 9 below.



**Figure 9.** Display of the designed BLYNK application

## RESULT AND DISCUSSION

### Hardware Design Results


The resulting hardware design can be seen in Figure 10, where the hardware is assembled in a 145×95 mm box containing an Arduino Uno, ESP8266 MCU Node, and INA219 sensor.



**Figure 10.** Components contained in the box

In the illustration above, it can be explained that in the box there is an Arduino microcontroller, ESP8266 MCU Node, INA219 sensor, and a series of resistors to inhibit the current from the LDR sensor connected to the ground on the Arduino. The LDR sensor is mounted on the top of the solar panel to optimally detect

sunlight. Meanwhile, servo motors are mounted on the left and bottom of the panel to allow movement with two axes, namely horizontal and vertical, as seen in Figure 11.

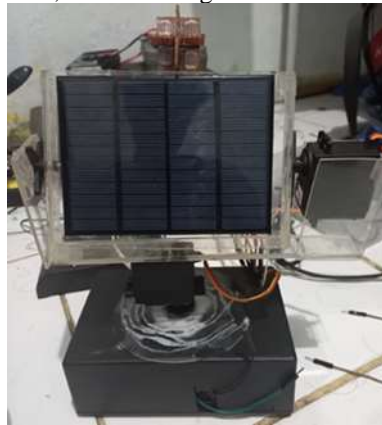

**Figure 11.** Solar Panel Tracker

The power or energy generated by the solar panel will pass through the INA219 sensor to measure voltage, current and power. After that the solar panel is also connected to the solar charge control, to regulate the power so that it can charge the battery or directly flow to the load.

**Solar Panel Monitoring Results**

When monitoring the second solar panel, the Blynk app was used interchangeably to monitor the voltage, current, and power generated by the panel. In addition, there are rotating axes used in the solar panel tracker, namely the vertical and horizontal axes. These two axes operate according to the position of the direction of incoming sunlight. In Figure 12, we can see how the placement is done during data collection on the solar panel tracker.



**Figure 12.** Testing the tracking solar panel

In this test, researchers compared two solar panels, one with a tracking system and one without. Both solar panels have identical specifications, namely 12 volts with 1.5 watts of power. Data collection was carried out every hour for three days, starting from 07:00 to 18:00. The results of monitoring the solar panels using the BLYNK application are documented in Table 3.

**Table 3.** Tracking Solar Panel Measurements

| Date       | Time  | Solar Panel tracker |        |       | Tracerless Solar Panels |        |       | Lux meter | Conditions                |
|------------|-------|---------------------|--------|-------|-------------------------|--------|-------|-----------|---------------------------|
|            |       | Volt                | Ampere | Watt  | Volt                    | Ampere | Watt  |           |                           |
| 10/07/2023 | 08.00 | 12,31               | 0,117  | 1,444 | 12,04                   | 0,057  | 0,690 | 4261      | Clear cloudy sky          |
|            | 09.00 | 12,18               | 0,119  | 1,449 | 12,02                   | 0,093  | 1,115 | 4890      | Clear sky slightly cloudy |
|            | 10.00 | 12,09               | 0,122  | 1,469 | 12,12                   | 0,102  | 1,233 | 5451      | Clear sky slightly cloudy |
|            | 11.00 | 12,28               | 0,129  | 1,585 | 12,14                   | 0,110  | 1,332 | 40360     | Clear cloudless sky       |
|            | 12.00 | 12,49               | 0,128  | 1,596 | 12,34                   | 0,127  | 1,567 | 64500     | Clear cloudless sky       |
|            | 13.00 | 12,36               | 0,126  | 1,555 | 12,28                   | 0,118  | 1,449 | 50750     | Clear sky slightly cloudy |
|            | 14.00 | 12,56               | 0,107  | 1,349 | 12,34                   | 0,100  | 1,236 | 38760     | Clear cloudless sky       |
|            | 15.00 | 12,20               | 0,091  | 1,105 | 12,28                   | 0,087  | 1,068 | 8965      | Clear cloudless sky       |
|            | 16.00 | 12,06               | 0,080  | 0,960 | 11,98                   | 0,061  | 0,731 | 6895      | Clear cloudy sky          |
| 11/07/2023 | 17.00 | 10,90               | 0,079  | 0,863 | 12,04                   | 0,057  | 0,690 | 5226      | Clear sky slightly cloudy |
|            | 08.00 | 12,13               | 0,097  | 1,179 | 11,75                   | 0,053  | 0,625 | 5613      | Clear cloudless sky       |
|            | 09.00 | 12,08               | 0,106  | 1,283 | 12,05                   | 0,098  | 1,182 | 9180      | Clear cloudless sky       |
|            | 10.00 | 12,01               | 0,105  | 1,263 | 12,01                   | 0,105  | 1,263 | 26420     | Clear cloudless sky       |



| Date       | Time  | Solar Panel tracker |        |       | Tracerless Solar Panels |        |       | Lux meter | Conditions                |
|------------|-------|---------------------|--------|-------|-------------------------|--------|-------|-----------|---------------------------|
|            |       | Volt                | Ampere | Watt  | Volt                    | Ampere | Watt  |           |                           |
| 12/07/2023 | 11.00 | 12,22               | 0,109  | 1,334 | 12,12                   | 0,106  | 1,281 | 31980     | Clear cloudless sky       |
|            | 12.00 | 12,12               | 0,115  | 1,389 | 12,06                   | 0,109  | 1,309 | 31100     | Clear sky slightly cloudy |
|            | 13.00 | 12,21               | 0,113  | 1,382 | 12,14                   | 0,099  | 1,198 | 35830     | Clear sky slightly cloudy |
|            | 14.00 | 12,11               | 0,115  | 1,387 | 12,04                   | 0,090  | 1,085 | 20390     | Clear cloudy sky          |
|            | 15.00 | 12,18               | 0,105  | 1,282 | 11,94                   | 0,098  | 1,171 | 14880     | Clear sky slightly cloudy |
|            | 16.00 | 12,11               | 0,105  | 1,274 | 10,67                   | 0,057  | 0,606 | 8902      | Clear cloudy sky          |
|            | 17.00 | 11,13               | 0,057  | 0,633 | 10,08                   | 0,031  | 0,310 | 5528      | Clear cloudy sky          |
|            | 08.00 | 12,00               | 0,083  | 1,001 | 10,85                   | 0,053  | 0,575 | 26130     | Cloudy sky                |
|            | 09.00 | 12,01               | 0,084  | 1,011 | 11,02                   | 0,057  | 0,628 | 35030     | Clear cloudy sky          |
|            | 10.00 | 12,23               | 0,089  | 1,091 | 11,45                   | 0,079  | 0,905 | 42070     | Cloudy sky                |
|            | 11.00 | 12,46               | 0,089  | 1,110 | 12,45                   | 0,081  | 1,008 | 43890     | Clear sky slightly cloudy |
|            | 12.00 | 12,30               | 0,109  | 1,343 | 12,25                   | 0,103  | 1,262 | 38460     | Clear sky slightly cloudy |
|            | 13.00 | 12,31               | 0,097  | 1,190 | 12,01                   | 0,090  | 1,083 | 34960     | Clear cloudy sky          |
|            | 14.00 | 12,28               | 0,094  | 1,154 | 11,96                   | 0,082  | 0,981 | 33780     | Clear cloudy sky          |
|            | 15.00 | 12,27               | 0,090  | 1,099 | 11,75                   | 0,060  | 0,705 | 25110     | Cloudy sky                |
|            | 16.00 | 12,10               | 0,080  | 0,970 | 11,31                   | 0,060  | 0,679 | 25830     | Cloudy sky                |
|            | 17.00 | 12,01               | 0,082  | 0,985 | 10,98                   | 0,059  | 0,648 | 2796      | Clear sky slightly cloudy |

From the two sets of data, it can be seen that both produce almost the same power at 12:00. This is because at that time, the sun is directly above both solar panels, so the solar panels without a tracker can also receive sunlight directly without any obstruction. However, at 08:00 and 17:00, there is a significant difference because the sun is not directly above the solar panels. As a result, the trackerless solar panel experiences a greater power drop.

**Comparison Results of Two-Axis Tracked Solar Panels with Trackless Solar Panels.**


To ascertain the difference in values produced by the tracking solar panel and the non-tracking solar panel, the two solar panels were compared. The following power comparison of the two solar panels can be seen in Table 4

**Table 4.** Tracking Solar Panel Measurements


| Date       | Time  | Solar Panel tracker | Tracerless Solar Panels | Difference (Tracer - No Tracer) |
|------------|-------|---------------------|-------------------------|---------------------------------|
| 10/07/2023 | 08.00 | 1,444               | 0,690                   | 0,75                            |
|            | 09.00 | 1,449               | 1,115                   | 0,33                            |
|            | 10.00 | 1,469               | 1,233                   | 0,24                            |
|            | 11.00 | 1,585               | 1,332                   | 0,25                            |
|            | 12.00 | 1,596               | 1,567                   | 0,03                            |
|            | 13.00 | 1,555               | 1,449                   | 0,11                            |
|            | 14.00 | 1,349               | 1,236                   | 0,11                            |
|            | 15.00 | 1,105               | 1,068                   | 0,04                            |
|            | 16.00 | 0,960               | 0,731                   | 0,23                            |
|            | 17.00 | 0,863               | 0,690                   | 0,17                            |
| 11/07/2023 | 08.00 | 1,179               | 0,625                   | 0,55                            |
|            | 09.00 | 1,283               | 1,182                   | 0,10                            |
|            | 10.00 | 1,263               | 1,263                   | 0,00                            |
|            | 11.00 | 1,334               | 1,281                   | 0,05                            |
|            | 12.00 | 1,389               | 1,309                   | 0,08                            |
|            | 13.00 | 1,382               | 1,198                   | 0,18                            |
|            | 14.00 | 1,387               | 1,085                   | 0,30                            |
|            | 15.00 | 1,282               | 1,171                   | 0,11                            |
|            | 16.00 | 1,274               | 0,606                   | 0,67                            |
|            | 17.00 | 0,633               | 0,310                   | 0,32                            |
| 12/07/2023 | 08.00 | 1,001               | 0,575                   | 0,43                            |
|            | 09.00 | 1,011               | 0,628                   | 0,38                            |
|            | 10.00 | 1,091               | 0,905                   | 0,19                            |
|            | 11.00 | 1,110               | 1,008                   | 0,10                            |
|            | 12.00 | 1,343               | 1,262                   | 0,08                            |




| Date | Time  | Solar Panel tracker | Tracerless Solar Panels | Difference (Tracer - No Tracer) |
|------|-------|---------------------|-------------------------|---------------------------------|
|      | 13.00 | 1,190               | 1,083                   | 0,11                            |
|      | 14.00 | 1,154               | 0,981                   | 0,17                            |
|      | 15.00 | 1,099               | 0,705                   | 0,39                            |
|      | 16.00 | 0,970               | 0,679                   | 0,29                            |
|      | 17.00 | 0,985               | 0,648                   | 0,34                            |

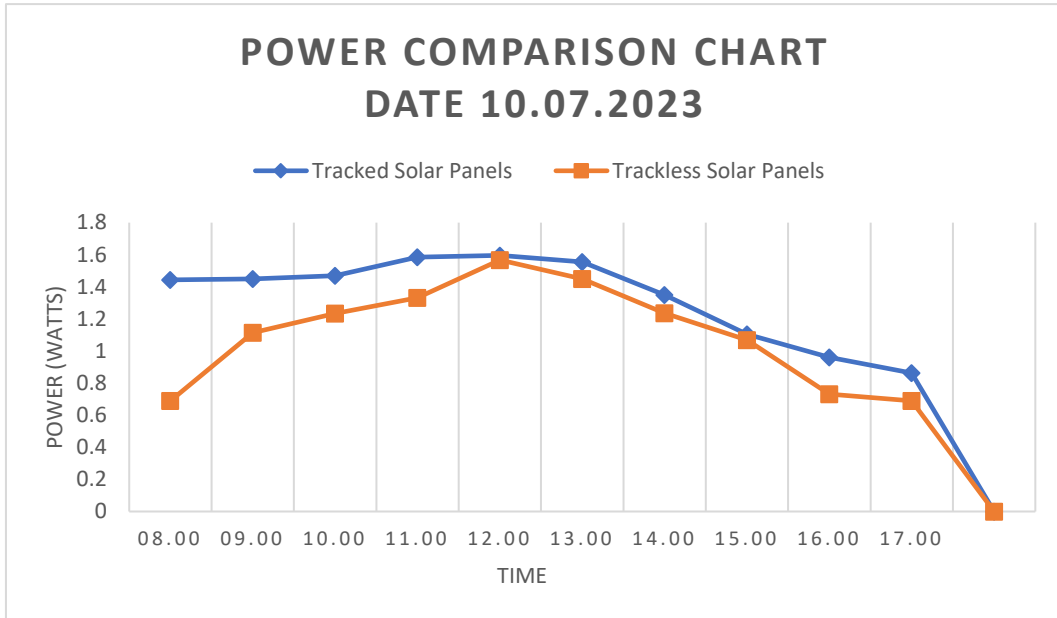

(a)

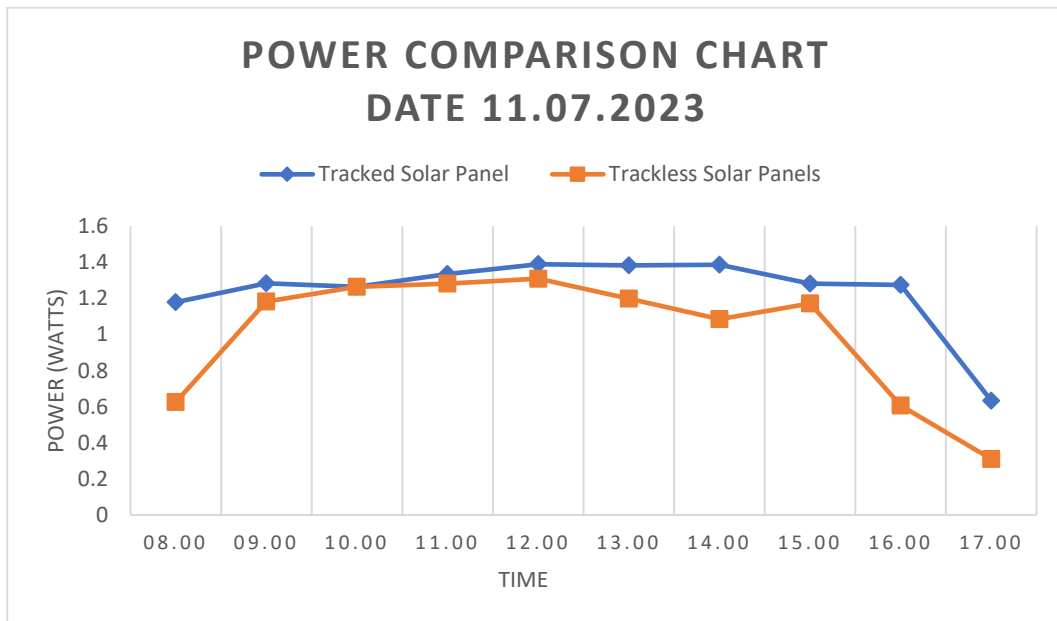

(b)

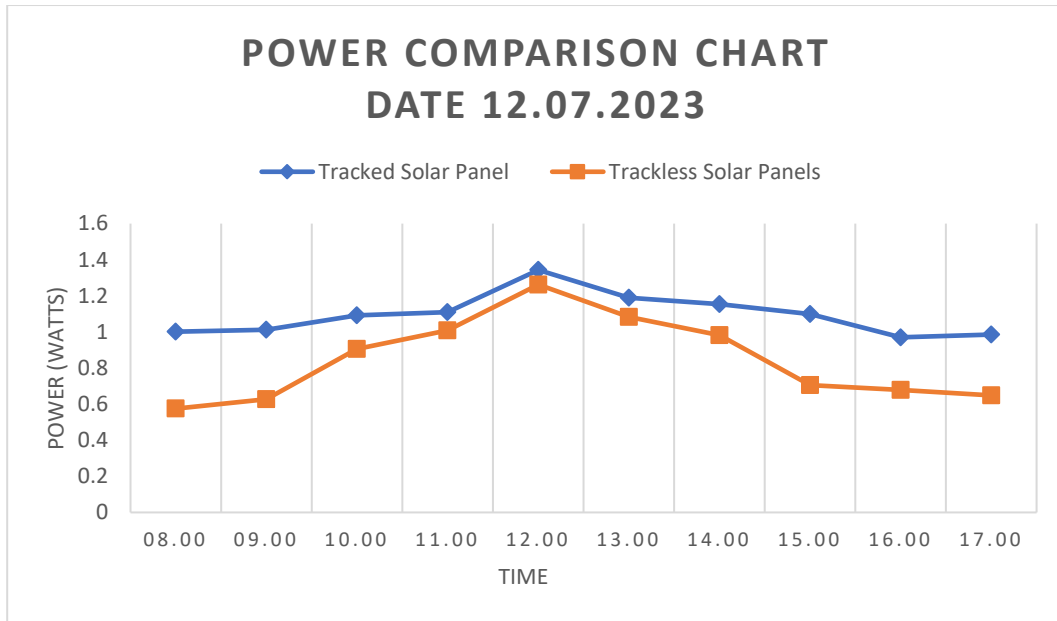

(c)  
**Figure 13.** Solar Panel Power Measurement Chart (a) Solar Panel Power Measurement Chart (b) Solar Panel Power Measurement Chart (c)

From Figure 13, it can be concluded that solar panels with a tracker produce more stable power than solar panels without a tracker. This is because the position of the solar panel with a tracker follows the direction of movement of sunlight, so that the solar panel slab is always exposed to direct sunlight. The improvement in solar panel power performance can be calculated by taking the average difference and multiplying it by 100%. Therefore, the value of the increase in solar panel power performance can be calculated as follows:  $0.226 \times 100\% = 0.226\%$  on 10.07.2020,  $0.237 \times 100\% = 0.237\%$  on 11.07.2020, and  $0.248 \times 100\% = 0.248\%$  on 12.07.2020. Thus, it can be concluded that the increase in power on the solar panel with the tracker is about 0.27%.

**CONCLUSION**

- Based on the research that has been conducted, the following conclusions can be drawn:
- Solar panel systems, both with and without tracking, have been successfully designed and tested in the sun. Sensor readings correspond to the direction of incoming sunlight, and energy calculations are performed accurately, enabling the sending of calculation values to the prepared Blynk application.
  - The solar panel tracking design successfully produced up to 1.5 watts of power. The largest power difference between the tracked and untracked solar panels is 0.75 watts. The increase in power obtained from solar panel tracking is about 0.27%. This is due to the specifications of the solar panel used, which is 12 volts with a power of 1.5 watts, so the difference is relatively small, being below 1%.
  - The voltage produced by solar panels tends to be stable when exposed to sunlight. However, the current and power generated are strongly influenced by weather conditions. In sunny and unobstructed weather, the current and power produced tend to be large. Conversely, in cloudy or cloudy weather conditions, the current and power generated by solar panels become relatively small.

## REFERENCES

- [1] S. A. Candra and F. Achmadi, "Optimasi Performa Mesin Gyrotory Crusher I dengan Menggunakan Metode OEE & Six Big Losses Di Pt Xyz," *Seminar Nasional Teknologi Industri Berkelanjutan II (SENASTITAN II)*, 2022.
- [2] J. K. R. S M, S. S V, and K. K, "Solar Power Remote Monitoring and Controlling Using IoT," in *2023 2nd International Conference on Advancements in Electrical, Electronics, Communication, Computing and Automation (ICAECA)*, Jun. 2023, pp. 1–5. doi: 10.1109/ICAECA56562.2023.10200775.
- [3] M. Ngafifi, "Kemajuan Teknologi Dan Pola Hidup Manusia Dalam Perspektif Sosial Budaya," *Jurnal Pembangunan Pendidikan: Fondasi dan Aplikasi*, vol. 2, no. 1, 2014, [Online]. Available: <http://www.tempo.co/read/news/2010/12/23>
- [4] F. Solomon, D. Champion, M. Steele, and T. Wright, "Embodied physics: Utilizing dance resources for learning and engagement in STEM," *Journal of the Learning Sciences*, vol. 31, no. 1, 2022, doi: 10.1080/10508406.2021.2023543.
- [5] W. Nugroho, "Reorienting the Principle of Sustainable Development in Investing Policy Utilizing Natural Resources and Energy in Indonesia," *Indonesian Journal of Energy*, vol. 5, no. 1, 2022, doi: 10.33116/ije.v5i1.119.
- [6] J. P. K. Pasaribu, "Dampak Dari Keterlibatan Menggunakan Listrik Pintar Dari Daya Beli Masyarakat Pada Ekonomi Rumah Tangga," vol. 4, no. 1, 2022.
- [7] A. A. Yurionica, D. A. Khodijah, and R. V. R. Nima, "Etika Dan Budaya Konsumtif Akibat Pembaruan Teknologi Smartphone," *Nusantara: Jurnal Pendidikan, Seni, Sains dan Sosial Humanioral*, vol. 1, no. 2, pp. 1–25, 2023.
- [8] Erwin, R. Fernanda, M. P. Dharma, N. R. Faiq, and I. K. Rafi, "Kajian Penerapan Sistem Fuel Cell Sebagai Sumber Energi Alternatif Ramah Lingkungan Pada Kendaraan Bermotor," *Jurnal Pendidikan Teknik Mesin Undiksha*, vol. 10, no. 2, Aug. 2022, doi: 10.23887/jptm.v10i2.45831.
- [9] N. Felika, E. R. M. Saleh, and M. A. Masuku, "Potensi Pengolahan Bioetanol dari Alang-Alang sebagai Bahan Bakar Nabati dengan Metode SSF (Simultaneous Saccharification and Fermentation) di Maluku Utara," *Cannarium*, vol. 20, no. 2, 2022, doi: 10.33387/cannarium.v20i2.5279.
- [10] K. Siregar, "Tinjauan Penilaian Siklus Hidup Bahan Bakar Biodiesel di Indonesia," *JURNAL RONA TEKNIK PERTANIAN*, vol. 7, no. 2, Oct. 2014, [Online]. Available: <http://www.jurnal.unsyiah.ac.id/RTP>
- [11] R. Andriani Mukti, "Tabir Surya Vs Iklim Tropis," 2014.
- [12] R. Hidayat, J. Fadi, M. Firdaus, M. Mursalin, M. Ridwan, and M. Rizki, "Modul Pembangkit Listrik Tenaga Surya Untuk Aplikasi Beban Rendah (600 W)," *Print) Jurnal INTEKNA*, vol. 17, no. 1, pp. 1–78, 2017, [Online]. Available: <http://ejournal.poliban.ac.id/index.php/intekna/issue/archive>
- [13] W. Kastolani and R. Mainaki, "Does Educational Disaster Mitigation Need To Be Introduced In School?," *SHS Web of Conferences*, vol. 42, 2018, doi: 10.1051/shsconf/20184200063.
- [14] R. Ginting and M. Zulfan, "Pengukuran Potensi Pemanfaatan Listrik Tenaga Sinar Matahari di Kabupaten Langkat," *Jurnal Sistem Teknik Industri*, vol. 22, no. 1, 2020, doi: 10.32734/jsti.v22i1.3257.
- [15] S. Putra, C. Rangkuti, and J. Teknik Mesin, "Perencanaan Pembangkit Listrik Tenaga Surya Secara Mandiri Untuk Rumah Tinggal," *Prosiding Seminar Nasional Cendekiawan*, 2016.
- [16] A. Agung Praing and R. Eka Saputra, "Analisis Potensi Pembangkit Listrik Tenaga Surya (PLts) Di Atap Gedung Kantor Gojek Giwangan, Daerah Istimewa Yogyakarta Menggunakan Software Pvsyst 7.2.6," *ResearchGate*, no. July, 2022.
- [17] T. Sutikno, J. Alfahri, and H. S. Purnama, "Monitoring Tegangan dan Arus Pada Panel Surya Menggunakan IoT," *Majalah Ilmiah Teknologi Elektro*, vol. 22, no. 1, 2023, doi: 10.24843/mite.2023.v22i01.p20.
- [18] C. I. Cahyadi *et al.*, "Efisiensi Recharger Baterai Pada Pembangkit Listrik Tenaga Surya," *Edu Elekrika Journal*, vol. 9, no. 2, Dec. 2020.
- [19] H. Zuddin and S. I. Haryudo, "Perancangan Dan Implementasi Sistem Instalasi Solar Tracking Dual Axis Untuk Optimasi Panel Surya," *Jurnal Teknik Elektro*, vol. 8, no. 3, 2019.
- [20] T. Kaur, S. Mahajan, S. Verma, Priyanka, and J. Gambhir, "Arduino based low cost active dual axis solar tracker," in *2016 IEEE 1st International Conference on Power Electronics, Intelligent Control and Energy Systems (ICPEICES)*, Jul. 2016, pp. 1–5. doi: 10.1109/ICPEICES.2016.7853398.
- [21] R. Khotama, D. B. Santoso, and A. Stefanie, "Perancangan Sistem Optimasi Smart Solar Electrical pada Pembangkit Listrik Tenaga Surya (PLTS) dengan Metode Tracking Dual Axis Technology,"

- Jurnal Ecotipe (Electronic, Control, Telecommunication, Information, and Power Engineering)*, vol. 7, no. 2, pp. 78–84, Oct. 2020, doi: 10.33019/jurnalecotipe.v7i2.1887.
- [22] E. B. Miranda and A. Goeritno, “Prediksi Daya Keluaran Panel Surya Seri-Paralel Melalui Metode Linearisasi Fungsi Tak-Linear,” *TRANSMISI : JURNAL ILMIAH TEKNIK ELEKTRO*, vol. 24, no. 4, 2022.
- [23] A. Deshmukh, P. Devmane, R. Ambekar, P. Piyush, and M. N. Patil, “Automated Dual Axis Sun Tracking Solar Panels based on LDR and RTC Sensor,” *International Journal of Engineering Research & Technology (IJERT) www.ijert.org*, vol. 10, no. 04, 2021.
- [24] M. J. Nahar, M. R. Sarkar, M. Uddin, M. F. Hossain, M. M. Rana, and M. R. Tanshena, “Single Axis Solar Tracker for Maximizing Power Production and Sunlight Overlapping Removal on the Sensors of Tracker,” *International Journal of Robotics and Control Systems*, vol. 1, no. 2, 2021, doi: 10.31763/ijrcs.v1i2.333.
- [25] R. Syafrialdi and Wildian, “Rancang Bangun Solar Tracker Berbasis Mikrokontroler Atmega8535 Dengan Sensor Ldr Dan Penampil Lcd,” *Jurnal Fisika Unand*, vol. 4, no. 2, 2017.
- [26] J. da R. Queiroz, A. da S. Souza, M. K. Gussoli, J. C. D. de Oliveira, and C. M. G. Andrade, “Construction and automation of a microcontrolled solar tracker,” *Processes*, vol. 8, no. 10, 2020, doi: 10.3390/pr8101309.
- [27] A. I. Bin Ibrahim, F. D. B. A. Rahman, and M. Bin Rohaizat, “Dual axes solar tracker,” *International Journal of Electrical and Computer Engineering*, vol. 8, no. 3, 2018, doi: 10.11591/ijece.v8i3.pp1887-1892.
- [28] C. Morón, D. Ferrández, P. Saiz, G. Vega, and J. P. Díaz, “New prototype of photovoltaic solar tracker based on arduino,” *Energies (Basel)*, vol. 10, no. 9, 2017, doi: 10.3390/en10091298.
- [29] S. A. Jumaat *et al.*, “Monitoring of PV performance using labVIEW,” *Indonesian Journal of Electrical Engineering and Computer Science*, vol. 12, no. 2, pp. 461–467, Nov. 2018, doi: 10.11591/ijeecs.v12.i2.pp461-467.
- [30] C. B. Ahmed, M. Kassas, and S. E. Ahmed, “PV-standalone monitoring system performance using LabVIEW,” *International Journal of Smart Grid and Clean Energy*, vol. 3, no. 1, 2014, doi: 10.12720/sgce.3.1.44-50.
- [31] M. Vyas, K. Chudasama, M. Bhatt, and B. Gohil, “Real Time Data Monitoring of PV Solar cell using LabVIEW,” *International Journal of Current Engineering International Journal of Current Engineering and Technology*, vol. 6, no. 6, 2016.
- [32] R. Dandu and T. S, “IoT Based Single Axis Solar Tracker,” in *2023 14th International Conference on Computing Communication and Networking Technologies (ICCCNT)*, 2023, pp. 1–5. doi: 10.1109/ICCCNT56998.2023.10307807.
- [33] M. Asep Rizkiawan, M. Tagore Siregar, H. Ramza, and E. Sjaiful Alim, “Designing an Information System for Recording Assets (Equipment) and Lending of Goods UHAMKA Information Technology Development Agency,” *International Journal of Advances in Engineering and Management (IJAEM)*, vol. 5, no. 6, p. 973, 2023, doi: 10.35629/5252-0506973979.
- [34] M. A. Rizkiawan, H. Ramza, and A. Sofwan, “IoT-based Temperature and Humidity Detector Prototype in the UHAMKA Data Center Room,” *Indonesian Journal of Artificial Intelligence and Data Mining*, vol. 7, no. 1, Mar. 2024.
- [35] M. N. A. Mohd Said, S. A. Jumaat, and C. R. A. Jawa, “Dual axis solar tracker with iot monitoring system using arduino,” *International Journal of Power Electronics and Drive Systems*, vol. 11, no. 1, 2020, doi: 10.11591/ijpeds.v11.i1.pp451-458.